

Amberg Tamping IMS 1000 / 3000

The fastest track survey systems for precise track works



Revolution of a measuring principle

- Trusted VMS work procedure (long-chord method) – with only one measurement trolley
- Combined survey of relative and absolute track geometry in one run
- Absolute track accuracy down to 1 mm
- Unrivalled survey performance up to 4000 m/h
- No geodetic skills for operator required
- Various export formats and safe transfer of correction data for tamping machines
- Up to 90 % cost savings compared to traditional methods

Modular system design


- Measuring trolley consisting of precision sensors for gauge, superelevation and distance and ruggedized notebook
- AMU 2010/2020/2030 (Amberg Measuring Unit) for unrivalled kinematic measurement precision
- Two control point (CP) measuring devices of choice:
 - Tachymeter (IMS 1000): single and multi CP mode
 - Profiler 120 FX (IMS 3000): single CP mode
- Modular system upgrading possibilities
- Easy handling, simple transportation
- LED-lighting for secure work at night
- Robust hardware design for hard environment



Front: Amberg IMS 1000 with tachymeter
Back: Profiler 120 FX for Amberg IMS 3000

Single control point mode


- High performance for long track sections
- First choice for measurements during short track closures
- Measuring performance up to 4000 m/h, typically 2500 m/h
- Distance between CP measurements up to 500 m
- Fully automatic relative control point measurement with IMS 1000
- No loss of accuracy due to refraction
- No line of sight required

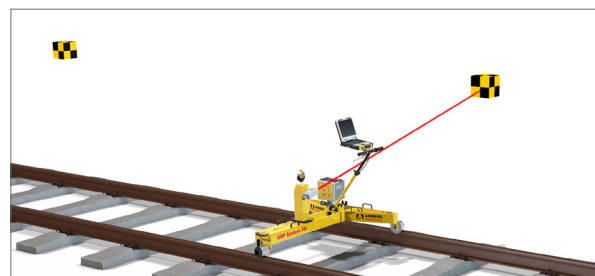

Single control point mode with Amberg IMS 3000 or IMS 1000

Multi control point mode

- For demanding project accuracies
- Tachymeter setup with multiple control points ensures highest accuracy and reliability
- Complete setup control out of Amberg Rail software
- Measuring performance up to 1500 m/h, typically 1000 m/h
- Distance between Tachymeter resections up to 500 m
- Increased efficiency without Tachymeter leveling
- Minimization of potential control point errors

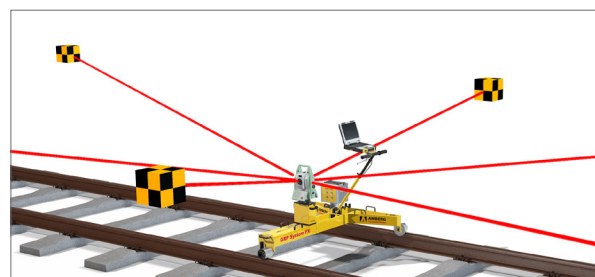

Multi control point mode with Amberg IMS 1000

Amberg Tamping IMS 1000 / 3000

System performance and technical data

System configuration			
	IMS 1000	IMS 3000	
Gauge (mm)	1000, 1067, 1435, 1520/24, 1600, 1668/76		
Gauge measuring range (mm) (re nominal gauges)	-25 to +65		
Cross level (cant) at 1435 mm (mm)	+/- 260		
CP measuring device	Leica total station MS50/60, TS50/60, TS30, TS15/16	Amberg Profiler I20 FX	
Weight total system (kg) incl. batteries, notebook, all measuring devices	45	43	
System performance			
	IMS 1000		IMS 3000
CP mode	single	multi	single
Typical measuring speed (m/h) ¹⁾	2500	1000	2500
Max. measuring speed (m/h)	4000	1500	4000
System accuracy			
Track position and height (mm) ²⁾	+/- 2	+/- 1	+/- 3
Cross level (cant) (mm)	+/- 0.5	+/- 0.5	+/- 0.5
Gauge (mm)	+/- 0.3	+/- 0.3	+/- 0.3
CP measurement (mm) ■ relative to track axis	+/- 1	+/- 1	+/- 3
AMU models			
	AMU 2030	AMU 2020	AMU 2010
Repeat accuracy @ 60m CP interval (mm)	+/- 1	+/- 2	+/- 3
Repeat accuracy @ 120m CP interval (mm)	+/- 2	+/- 4	+/- 6
Repeat accuracy @ 300m CP interval (mm)	+/- 5	+/- 12	+/- 20

¹⁾ Typical experience values, may depend on project conditions.

²⁾ Depending on e.g. chord length, control point quality, positioning sensor, project conditions and used AMU model.

Environmental specifications	
	IMS 1000 / IMS 3000
Working temperature range	- 10° C to +50° C
Humidity (non-condensing)	< 80%
Tamping data	
Tamping data preparation (correction data calculation incl. ramping)	< 15 min / 500 m
Tamping data formats	Plasser WinALC, ALC CGV5 Framafer BAO3 Matisa Harsco
System approvals	
CE Conformity	EN 61326-1:2013 EN 61000-6-2:2005 EN 61000-6-4:2007/A1:2011 EN 60825-1:2014 EN 13848-4 EN 13977:2011 Directives 2014/30/EU Directives 2014/35/EU Directives 2011/65/EU
GRP System FX approvals from	Network Rail / London Underground (UK), Deutsche Bahn (DE), SBB (CH), SNCF (FR), ÖBB (AT), RFI (IT), Adif (ES), ProRail (NL), Infrabel (BE)
Extract of references	
Amberg's railway surveying solutions have proven their high performance all over the world. Demanding projects have been successfully realised in e.g. Germany, Austria, Belgium, the Netherlands, Denmark, France, Italy, Spain, Greece, Turkey, Australia, United Kingdom, Saudi Arabia, UAE, Korea, USA, PR China.	